

SONORA® BLACK ACOUSTIC BOARD

Construction:

1" or 2" thick 3 PCF or 6-7 PCF Ecosse® glass fiber core with black matte scrim facing

Size: 4' x 8'


Mounting: Adhesive, Washer Plate, Impaling clips, Z-Clips.

Finish: Black Scrim Fabric

Fire Rating: Class A

Sound Absorption Coefficients (3 PCF Ecosse® Board)							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.13	.24	.56	.83	.93	.98	.65
2"	0.33	.67	1.08	1.07	1.03	1.06	.95

Sound Absorption Coefficients (6-7 PCF Ecosse® Board)							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.80	.96	.79	1.00	1.06	1.08	.95
2"	0.39	.63	1.06	1.13	1.09	1.10	1.00

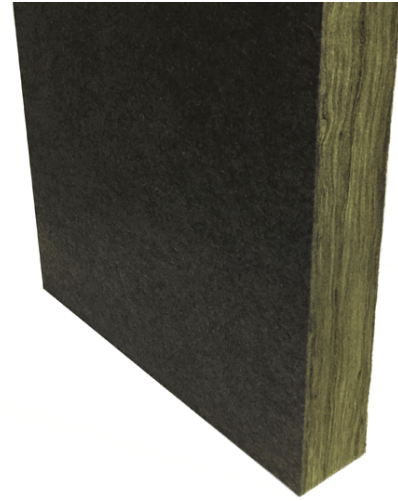

SONORA® BLACK ACOUSTIC BLANKET

Construction:

1.5 PCF Ecosse® glass fiber core with black matte scrim face.

Thickness: 1", 2"

Size: 4' Standard Width

Finish: Black Scrim Fabric

Mounting: Washer Plates, Adhesive

Fire Rating: Class A

Sound Absorption Coefficients (1.5 PCF Ecosse® Blanket)							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.18	.36	.59	.86	.95	.90	.70
2"	0.34	.64	.96	1.03	1.00	1.03	.90



SONORA® LITE PANEL - PVC Encapsulated

Construction:

1.5 PCF or 3 PCF glass fiber core with PVC Covering

Thickness: 1", 2"

Size: up to 4' x 8'

Mounting: 3" Diameter Washer Plates

Finish: PVC Film

Fire Rating: Class A

Sound Absorption Coefficients (1.5 PCF Ecosse® Blanket)							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"(3PCF)	0.07	.31	.76	1.12	.68	.26	.70
2"(1.5PCF)	0.35	.80	1.19	1.02	.63	.32	.90

