




CUTTING WEDGE® FOAM

Cutting Wedge Classic
2'x4'

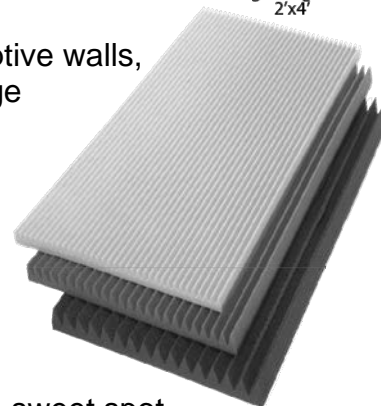

Cutting Wedge® can be installed to create absolutely seamless absorptive walls, and enhance imaging by reducing unwanted reflections. Cutting Wedge can be used to simply and efficiently to minimize reverb and create premium environments for recording voiceovers, vocals, and more.

- Prevent destructive specular reflections from distorting or coloring the sweet spot.
- Eliminate room modes, comb filtering, standing waves and undesirable specular artifacts.
- Attenuate sound pressure buildup at room boundaries (where walls meet walls.)

SIZES:

CW Classic: 2", 3", 4", & 6" thicknesses,
as 1' x 1' squares and 2' x 4' sheets

Color: Charcoal.

Material: Open Cell Polyurethane Foam

Density: 2 pounds per cubic foot

Flammability: Meets UL94HF-1

Flame Spread= 95

Smoke Density= 340

Tensile Strength= 20

(Note: This is not a Class A Fire Rating.)

Can be installed using a construction adhesive that is approved for foam.

Sound Absorption Coefficient							
Cutting Wedge® Classic							
Size	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
2"	0.24	0.31	0.69	0.94	0.95	0.96	0.70
3"	0.24	0.58	0.67	0.91	0.96	0.99	0.80
4"	0.33	0.90	0.84	0.99	0.98	0.99	0.95
6"	0.52	1.12	0.88	1.05	1.06	1.02	1.05

*NOTE: This product contains a chemical known to the State of California to cause cancer.