



## GEOMETRIX™ BROADBAND ABSORBER

**Construction:**

Fabric-Wrapped Broadband corner trap. Half or Quarter Round.

**Size:** Half (1/2) Round – 24” Diameter  
Quarter (1/4) Round – 12” Radius  
**Lengths:** 48”, 96” (Custom lengths available)  
**Fabric:** Guiford of Maine® FR701 Style 2100  
**Mounting:** Z-Clips  
**Fire Rating:** Class A



Sound Absorption Coefficient – Half Round


125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.54	1.40	1.35	1.31	1.32	1.27	1.35

## SONORA® LFC (Low-Frequency Control) Panel

**Construction:**

Fabric-Wrapped Bass Trap. Multi-Density Fiberglass core with a reflective/resonant face. Tuned for bass.

**Size:** 4’x4’x 4 1/8” (Custom Sizes available)  
**Fabric:** Guiford of Maine® FR701 Style 2100  
**Mounting:** Z-Clips  
**Fire Rating:** Class A  
**Bass Absorption:** 1.08 @ 80 Hz & 0.92 @ 100 Hz

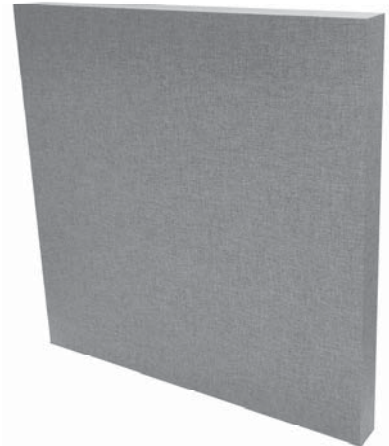

Sound Absorption Coefficient – 4’x4’

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0.71	0.55	0.54	0.39	0.33	0.29	0.45

## SONORA® CORNER BASS TRAP

**Construction:**

6-7 PCF fiberglass core with high NRC rating.

**Thickness:** 4”

**Size:** 24” x 48” or 18”x48” (Custom sizes available)

**Finish:** Guiford of Maine® FR701 Style 2100

**Fire Rating:** Class A

Performs as well or better than 4” Sonora® Wall Panel

